


Shower faucets installation instruction

1. Twine the offset connectors with teflon tape and install connectors into pre-set supply pipes. (The center-to-center distance between the connectors is 150mm and 900~1000mm from the ground.)
2. According to the basic dimension measure the location of the point above, drill the holes on the wall, spray sizing into it and fix base on the wall.
3. Assemble connection kits of faucet and connect them to the offset connectors and fixed base. If the positions don't match, just adjust the offset connectors and fixed base. Must insert the gasket between them.
4. Connect the overhead shower to L pipe. Make sure connect firmly. Then install the hose to faucet and handspray.

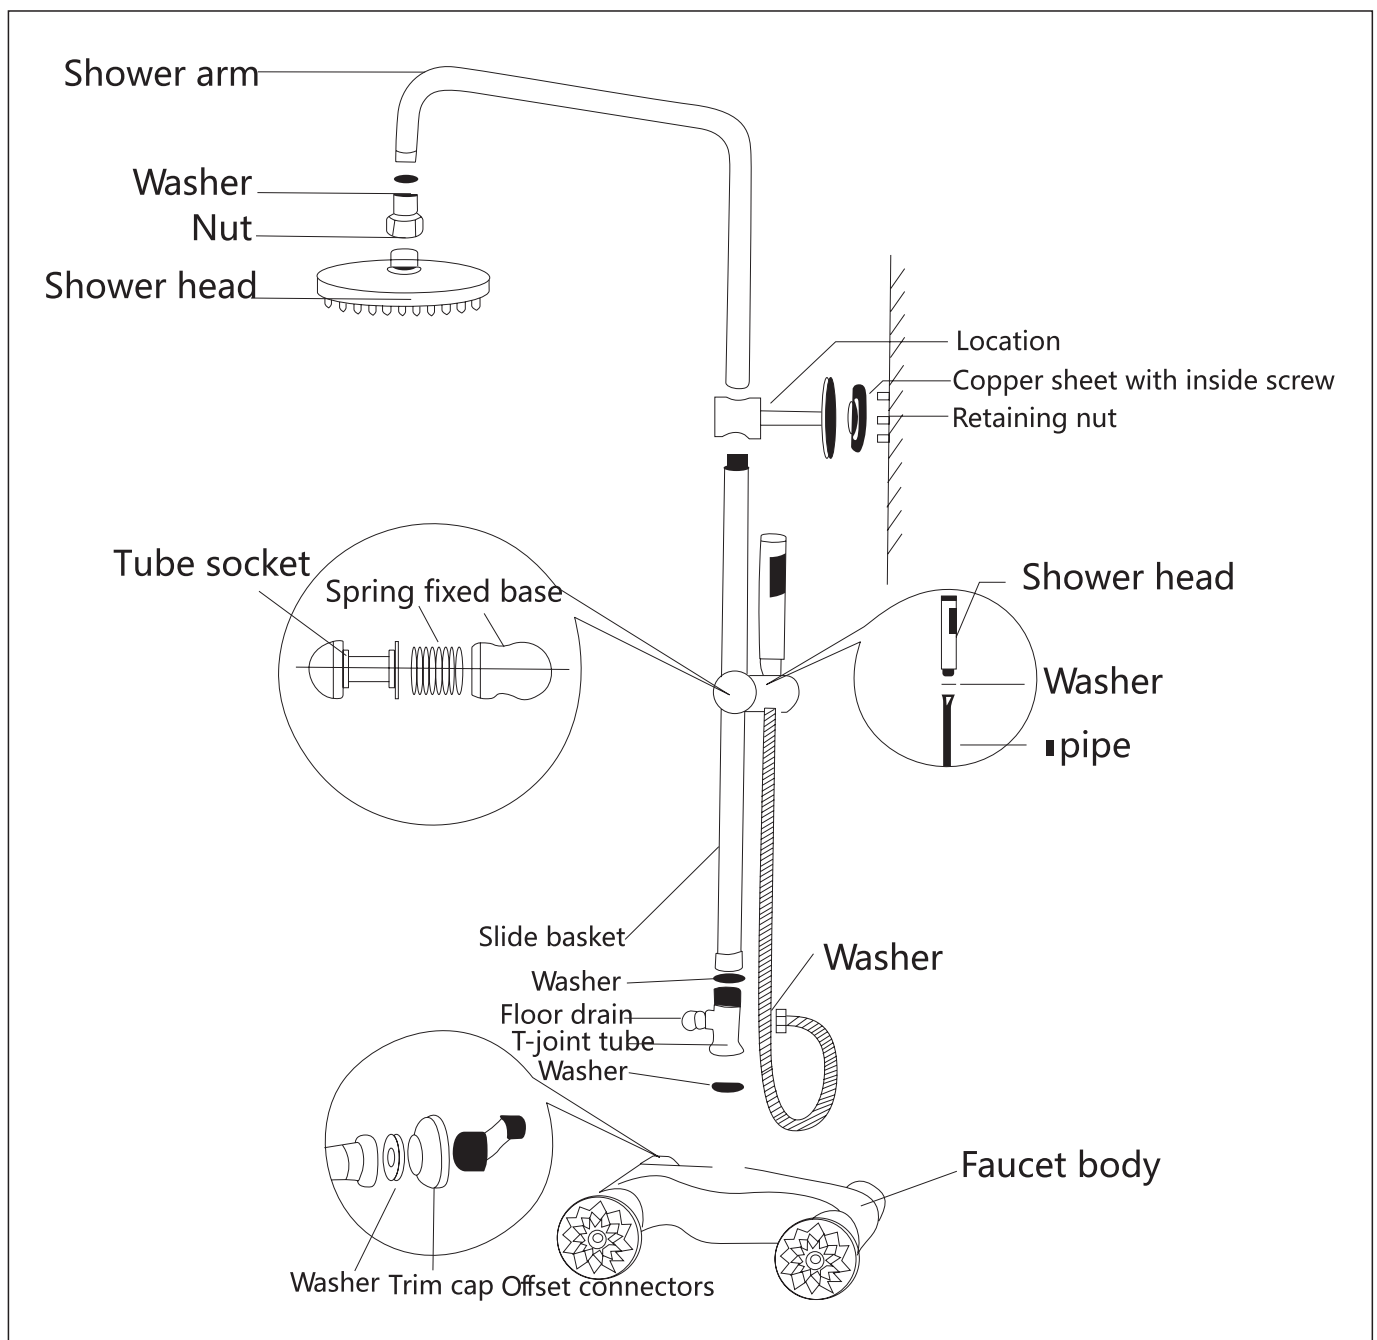

Note and maintenance

The dimensions of faucet must match the dimensions of the embedded water supply pipe.

1. Please be sure to remove debris and mud in embedded water supply pipe before installing faucet in case block of faucets affects water outlet.
2. Please note left for hot water and right for cold water. If wrong, the red/blue label in the handle will be contrary.
3. After installing please open water supply valves and check for connections and leaks.
4. There is silica gel and other components which does not survive high temperatures in the internal structure of faucet. Please don't use it in high temperatures environment: including in more than 90 degree water temperature for a long time.
5. Faucet body has been tested and debugged by factory. Don't dismounting in privately case affect performance!
6. Use water pressure under 0.05Mpa-0.75Mpa
7. Shower column and slide bar should not be less than one meter from bath heater to avoid high temperature scald products.
8. Don't pull shower hose hard to avoid the rupture of the hose.
9. Product groups with different models have their own design features. This instruction is only for reference.

Please clean up the faucet regularly in order to keep its surface bright and clean.

1. Clean the faucet and wipe surface with a soft cotton cloth
2. Don't use wash detergent or nylon bristle brush with coarse-grain, such as cleaner, polishing powder etc. to avoid wear product.
3. Since the acid detergent can erode the coating, can't use it on faucet. If use acid detergent to clean the ceramic tile, flush the tile and tableware thoroughly at once. So detergent doesn't flow the surface of faucet to erode its coatings.
4. Please flush all detergent and wipe faucet with soft cotton cloth after the cleaning.

Warranty covers only manufacturing defect and defect due to transportation from factory to your home

Other than this warranty covers body's corrosion up to 3 years from the date of purchase. For claiming the

warranty we need invoice copy (Hard or soft). After 3 years the maintenance charges and labor are applicable.

THANKS FOR CHOOSING OUR PRODUCT.